




技術資料 Technical data

- 作動電壓Operating voltage : 24VDC(需搭配電流連接器with rectied plug connector)
- 連接選項Connector options : 2 PIN式連接器和電流連接器Flying leads, two-pole connector and Hirschman connector
- 固定方式Mountings : 磁鐵背面的螺紋孔Threaded holes in magnet rear face
- 磁鐵表面Finish : 加工後表面電鍍堅固的保護外層Bright nickel plated with machined face
- IP等級IP rating : IP54
- 環境工作溫度Ambient working temp. : 35°C

型號 Model	吸取力(N) Suction force	PCD(mm)
MA-25	113	15
MA-30	253	18
MA-40	575	26
MA-50	1097	34
MA-60	1677	40

	間隙距離 Dimension mm									
	0	0.09	0.18	0.27	0.36	0.59	1.00	1.59	2.00	4.00
直徑Diameter	拉力 Rally N									
25mm	113	34	19	11	7	4	2	-	-	-
30mm	253	94	50	32	21	11	5	3	2	-
40mm	575	289	153	97	59	32	15	8	4	3
50mm	1097	639	403	268	190	100	48	24	10	6
65mm	1677	949	554	347	237	129	64	31	15	10

外觀尺寸圖 Dimensions

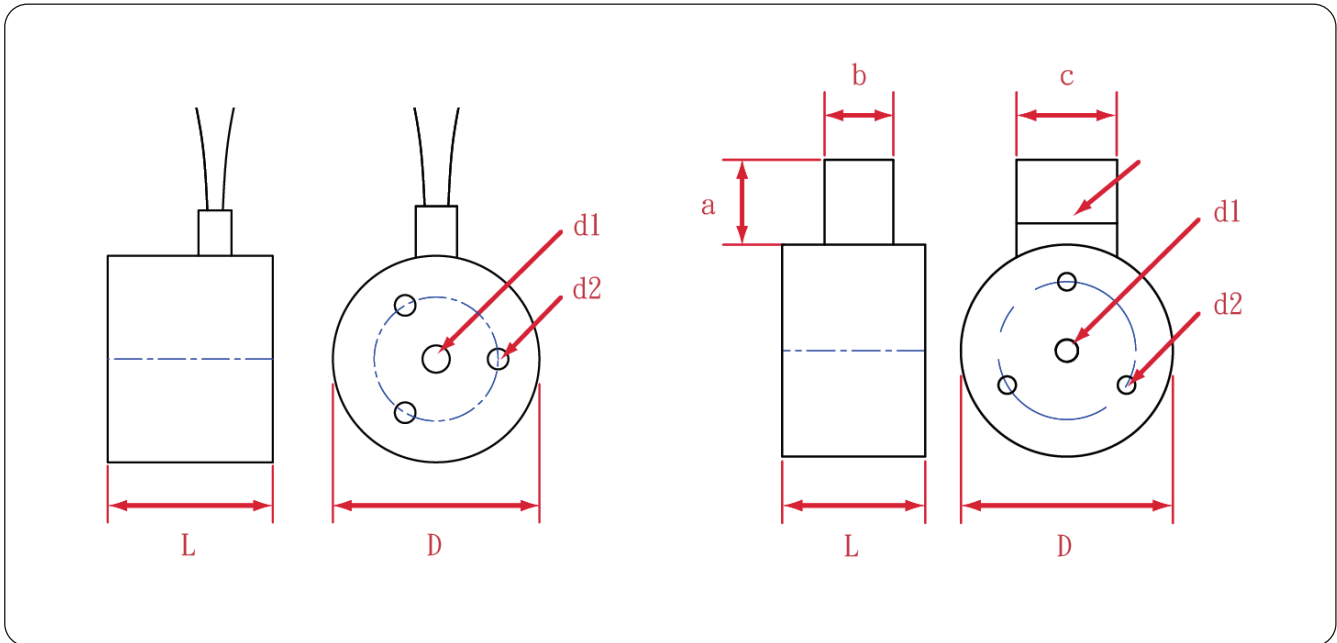

產品編號 Product number	尺寸 Size							PCD	重量 weight
	D	L	a	b	c	d1	d2		
	mm								
MA-25	25	20				M4	M3	15	66
MA-30	30	24				M5	M3	18	108
MA-40	40	27	16	13	19	M5	M4	26	210
MA-50	50	30	16	13	19	M5	M4	34	364
MA-65	65	35	16	13	19	M8	M5	40	710

MA

適用範圍APPLICATIONS

適用於搬運鋼板、鐵塊及圓柱鐵材,如:機械零件、衝床模具、塑膠模具及各類鋼鐵材料...等
Suitable for move plate steel, block steel and round steel, such as machine parts, press molds, plastic molds and iron materialetc.

